

LP32

The package works only with the Led Player Software under restricted mode. It is our most economic package. MOQ required. Great products for simple project with few channels and product promotion.

Hardware features :

Input USB 2.0 via Mini USB

Number of DMX Outputs up to 32 on 3 pin XLR

Stand Alone Mode Yes, 32 channels, fine DMX channels (16 bits)

Internal Memory Yes (10 Kb)

Memory Capacity 55 steps with 32 ch.

Power Supply Input 5V via USB

High voltage Protection Yes

Housing Strong Aluminum

Operating Temperature - 25 to +70 C°

Certifications CE, RoHS, Fcc

International Warranty Yes, 6 months

Software features:

LED Player 32 channels, stand alone, No Audio Beat, No Wi-Light, 12 Scenes and 12 Programs in Live Board

Studio DMX 3D viewer Demo mode, 20 object / 20 fixtures max., 192 channels max.

Pro DMX No

Art-Net Output from PC No

Wi-Light 2016 App No

System Compatibility Windows, MAC Os X (10.6 and higher) and Linux (64 Bits)

Free Software Updates Yes

Package Content:

Small package + 1 USB cable + 1 USB to DMX Interface (3 Pin XLR)



LP128

The LP128 is our first entry-level DMX controller. The package works only with the Led Player Software under restricted mode. It is ideal for tight budget and very small projects. Thanks to the very attractive Price.

Hardware features :

Input USB 2.0 via Mini USB

Number of DMX Outputs up to 128 on 3 pin XLR (XLR5 optional)

Stand Alone Mode Yes, 128 channels, fine DMX channels (16 bits)

Internal Memory Yes (40 Kb)

Memory Capacity 2600 steps with 16 ch., 650 steps with 64 ch., 325 steps with 128 ch.

Infra-red Receiver Yes, (IR remote control for triggers available in option)

Infra-red Options 10 scene selection, scene speed, general dimmer and next scene

Dry Contact Triggers Yes (4 contacts port on 3,3V or 5V)

Next Scene Trigger Button Yes

Power Supply Input 5V via USB

High voltage Protection Yes

Housing Strong Aluminum

Operating Temperature - 25 to +70 C°

Certifications CE, RoHS, Fcc

International Warranty Yes, 1 year

Software features:

LED Player 128 channels, stand alone, No Audio Beat, 30 Scenes and 30 Programs in Live Board

Studio DMX 3D viewer Demo mode, 20 object / 20 fixtures max., 192 channels max.

Pro DMX No

Art-Net Output from PC No


Wi-Light 2016 App Yes, can control the LED Player Live Board with a WIFI connection

System Compatibility Windows, MAC Os X (10.6 and higher) and Linux (64 Bits)

Free Software Updates Yes

Package Content:

Small package + 1 USB cable + 1 USB to DMX Interface (3 Pin XLR)

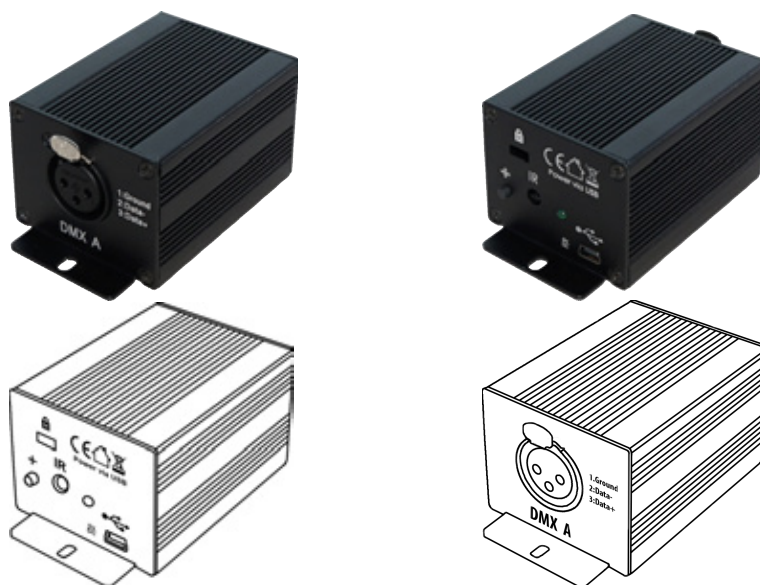

LP512

The LED Player 512 (LP512) controller is our economical entry-level price product. The offer includes an Electronic Card with 512 DMX Channels and works with the Led Player Software and Pro DMX software under restricted mode. Thanks to the attractive Price you should see a quick return on your investment. Users looking for an easy DMX system to operate will much appreciate the LP512 possibilities.

Hardware features :

Input USB 2.0 via Mini USB

Number of DMX Outputs up to 512 on 3 pin XLR (XLR5 optional)

DMX Input Yes (PC mode only for DMX in record)

Stand Alone Mode Yes, 512 channels, fine DMX channels (16 bits)

Internal Memory Yes (40 Kb)

Memory Capacity 2600 steps with 16 ch., 155 steps with 256 ch., 75 steps with 512 ch.

Infra-red Receiver Yes, remote control for triggers included (10m away max)

Infra-red Options 10 scene selection, scene speed, general dimmer and next scene

Dry Contact Triggers Yes (4 contacts port on 3,3V or 5V)

Next Scene Trigger Button Yes

Power Supply Input 5V via USB, US or EURO 5V. USB power supply included

High Voltage Protection Yes

Housing Strong Aluminum

Operating Temperature - 25 to +70 C°

Certifications CE, RoHS, Fcc

International Warranty Yes, 3 years

Software features:

LED Player 512 channels, full mode, Stand Alone mode, Live Board mode, Audio Beat

Studio DMX 3D viewer Demo mode, 20 object / 20 fixtures max., 192 channels max.

Pro DMX Yes (limited mode), 100 channels and 20 buttons max., no multi tab, no Timeline

Art-Net output from PC Yes, 1 Universe (DMX or Artnet)

Wi-Light 2016 App Yes, can control the LED Player Live Board with a WIFI connection

System Compatibility Windows, MAC Os X (10.6 and higher) and Linux (64 Bits)

Free software updates Yes

Package Content:

1 USB cable + 1 USB to DMX Interface (3 Pin XLR, 5 pins in option) + 1 Infra-Red Remote control + 1 US/EUR 5V. USB power supply



CLUB 1024

Club 1024 is recommended for demanding projects such as sound to light show Sync. or any Live performance or when a high number of DMX channels are needed. This package includes a 2x512 DMX channels interface. When Club DMX is connected to your PC the device unlocks the Studio DMX 3D simulation software and activates most of Pro DMX software options. Professional Light Jockeys and Light designers will appreciate all the possibilities of the CLUB 1024 package.

Hardware features :

Input USB 2.0 via Mini USB

Number of DMX Outputs up to 1024 on 3 pin XLR (XLR5 optional)

DMX Modes 2x512 (splitter), 1024, 512 in/out

DMX Input Yes (PC mode only for DMX in record or DMX in trigger and control)

Stand Alone Mode Yes, 512 channels on DMX A, fine DMX channels (16 bits)

Internal Memory Yes (40 Kb)

Memory Capacity 2600 steps with 16 ch., 155 steps with 256 ch., 75 steps with 512 ch.

Infra-red Receiver Yes, (IR remote control for triggers available in option)

Infra-red Options 10 scene selection, scene speed, general dimmer and next scene

Dry Contact Triggers Yes (4 contacts port on 3,3V or 5V)

Next scene Trigger Button Yes

Power Supply Input 5V via USB

High Voltage Protection Yes

Housing Strong Aluminum

Operating Temperature - 25 to +70 C°

Certifications CE, RoHS, Fcc

International Warranty Yes, 3 years

Software features:

LED Player 1024 channels DMX + Art-Net, full mode, Stand Alone mode, Live Board mode

Studio DMX 3D viewer Full mode

Pro DMX Yes, 1024 channels, full mode, 30 minute loop of Audio and Video Timeline

Art-Net output from PC Yes, 2 Universes (DMX + Artnet = 4 universes)

Wi-Light 2016 App Yes, Basic LED Player and Pro DMX commands with a WIFI connection

System Compatibility Windows, MAC Os X (10.6 and higher) and Linux (64 Bits)

Free software updates Yes

Package Content:

1 USB cable + 1 USB to DMX Interface (3 Pin XLR, 5 pins in option)



PRO NET 16, 64, 128

PRO NET are ideal when a high number of DMX channels are needed (up to 65536 DMX channels on 128 Universes). Computers can support a maximum of 10 USB interfaces connected together, over this limit, it is necessary to switch to ArtNet protocol (DMX through IP/Ethernet). The PRO NET devices unlock the software ArtNet universes from the computer network card (computer Ethernet RJ45 port). You can also use the 2x512 DMX channels of the USB interfaces together with Artnet. Additional Pro DMX software features are available with PRO NET like : PC time trigger, MTC and 24H of audio & video Timeline are available with Pro DMX.

Hardware features :

Input USB 2.0 via Mini USB

Number of DMX Outputs up to 1024 on 3 pin XLR (XLR5 optional)

DMX Modes 2x512 (splitter), 1024, 512 in/out

DMX Input Yes (PC mode only for DMX in record or DMX in trigger and control)

Stand Alone Mode Yes, 512 channels on DMX A, fine DMX channels (16 bits)

Internal Memory Yes (40 Kb)

Memory Capacity 2600 steps with 16 ch., 155 steps with 256 ch., 75 steps with 512 ch.

Infra-red Receiver Yes, (IR remote control for triggers available in option)

Infra-red Options 10 scene selection, scene speed, general dimmer and next scene

Dry Contact Triggers Yes (4 contacts port on 3,3V or 5V)

Next scene Trigger Button Yes

Power Supply Input 5V via USB

High Voltage Protection Yes

Housing Strong Aluminum

Operating Temperature - 25 to +70 C°

Certifications CE, RoHS, Fcc

International Warranty Yes, 3 years

Software features:

LED Player 1024 channels DMX + Art-Net, full mode, Stand Alone mode, Live Board mode

Studio DMX 3D viewer Ultimate mode, Shadows, 2D ground map, video record, etc..

Pro DMX Yes, 1024 channels, full mode, 24 Hours loop of Audio and Video Timeline, PC Clock triggers, Midi Time Code (MTC), Timeline Live record, etc...

Art-Net output from PC Yes, 16, 64 or 128 Universes (DMX + Artnet)

Wi-Light 2016 App Yes, Basic LED Player and Pro DMX commands with a WIFI connection

System Compatibility Windows, MAC Os X (10.6 and higher) and Linux (64 Bits)

Free software updates Yes

Package Content:

1 USB cable + 1 USB to DMX Interface (3 Pin XLR, 5 pins in option)



DIN 1024

The DIN 1024 has a special design to fit in all electrical cabinet with DIN rails. With a high-performance Stand Alone mode and plenty of triggers possibilities, this is the perfect device for easy and quick integration projects. DIN 1024 has 15 contacts, screw Terminal Block connectors and a compatible Rail DIN housing, the hardware works in a splitter mode or in/out mode and can receive (in stand alone) DMX triggers from another DMX device.

Hardware features :

Input USB 2.0 via Mini USB

Number of DMX Outputs up to 1024 on screw connectors

DMX Modes 2x512 (splitter), 1024, 512 in/out

DMX Input Yes (PC and Stand Alone mode, DMX record, DMX trigger)

Stand Alone Mode Yes, 2x512 (splitter), 1024, 512 in/out, fine DMX channels (16 bits)

Stand Alone DMX Merging Yes, merge several interfaces to play different Zones together

Internal Memory Yes (4 Mb)

Memory Capacity 20000 steps with 16 ch., 6000 steps with 512 ch., 3000 steps with 1024 ch.

Real Time Clock - RTC Yes, Time and calendar triggers (minutes, hours, week days, month)

Dry Contact Triggers Yes 15 dry contacts (contact on 3,3V or 5V)

RS232 Triggers Yes, scene selection, speed, dimmer, zone, black out

Infra-red Receiver Yes, external IR PCB and IR remote control available in option

Infra-red Options 10 scene selection, scene speed, general dimmer and next scene

Light intensity Triggers Yes, external PCB with Light sensor available in option

Master/Slave Yes, synchronize and connect up to 32 interfaces together in stand alone

Power Supply Input 9V to 36V DC input on screw connectors, 5V via USB

High Voltage Protection Yes

Housing DIN Rail compatible, ABS Plastic

Operating Temperature - 25 to +70 C°

Certifications CE, RoHS, Fcc

International Warranty Yes, 3 years

Software features:

LED Player 1024 channels DMX + Stand Alone mode, Live Board mode

Studio DMX 3D viewer Demo mode, 20 object / 20 fixtures max., 192 channels max.

Pro DMX Yes (limited mode), 100 channels and 20 buttons max., no multi tab, no Timeline

Art-Net output from PC Yes, 1 Universe (DMX or Artnet)


Wi-Light 2016 App Yes, can control the LED Player Live Board with a WIFI connection

System Compatibility Windows, MAC Os X (10.6 and higher) and Linux (64 Bits)

Free software updates Yes

Package Content:

1 USB cable + 1 USB to DMX Interface (33 Pins screw connectors)

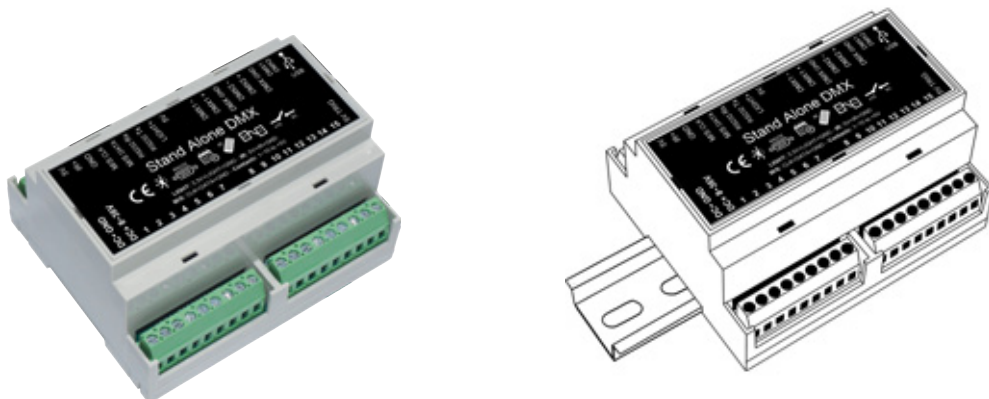

CQSA 512 / CQSA 1024

CQSA 512 and CQSA 1024 are the perfect controller for all type of projects thanks to its powerful Stand Alone mode. Compatible with all our software, they are suitable for all Live applications and fixed installations. The 512 or 1024 channels can play back a complete project without computer and the SD card slot gives the possibility to extend the memory capacity. Their Splitter mode can well secure your installation and the USB interfaces offer more triggering possibilities. User can customized the interface functioning and load in memory the Stand Alone modes of their choice (available modes : Play scene, Scene Pages, Zones, Colors, Dimmer, Speed).

Hardware features :

Input USB 2.0 via Mini USB

Number of DMX Outputs (512/1024) up to 512 / 1024 on 3 pin XLR (XLR5 optional)

DMX Modes (512) 2x512 (Splitter) or 512 in/out (PC mode)

DMX Modes (1024) 2x512 , 1024 or 512 in/out (PC + Stand Alone)

DMX Input (512) Yes (PC only, DMX record, DMX trigger)

DMX Input (1024) Yes (PC and Stand Alone mode, DMX record, DMX trigger)

Stand Alone Mode (512) Yes, 2x512 (splitter), fine DMX channels (16 bits)

Stand Alone Mode (1024) Yes, 2x512 (splitter), 1024, 512 in/out, fine DMX channels (16 bits)

Multiple Zone (512) No, 1 Zone, can play 1 scene per time

Multiple Zone (1024) Yes, 5 Zones, can play 5 different scenes per time

Stand Alone DMX Merging Yes, merge several interfaces to play different Zones together

Internal Memory Yes (4 Mb)

Memory Capacity 20000 steps with 16 ch., 6000 steps with 512 ch., 3000 steps with 1024 ch.

Real Time Clock - RTC Yes, Time and calendar triggers (minutes, hours, week days, month)

Trigger buttons yes, 8 buttons with Blue status LED

Option Buttons Yes, 4 buttons (Mode, Valid, Next, Previous)

Button modes Yes, Scene Trigger, Scene Pages, Colors, General Dimmer, Scene speed

RJ45 Easy I/O connectors Yes, RJ45 connectors for all In/Out pins and connections

Dry Contact Triggers Yes (7 contacts port on 3,3V or 5V)

RS232 Triggers Yes, scene selection, speed, dimmer, zone, black out

Infra-red Receiver Yes, external IR PCB and IR remote control available in option

Infra-red Options 10 scene selection, scene speed, general dimmer and next scene

Light intensity Triggers Yes, external PCB with Light sensor available in option

Master/Slave Yes, synchronize and connect up to 32 interfaces together in stand alone

Power Supply Input 9V to 36V DC input on DC connectors, 5V via USB

High Voltage Protection Yes

Housing Black with 4 mounting holes, ABS Plastic

Operating Temperature - 25 to +70 C°

Certifications CE, RoHS, Fcc

International Warranty Yes, 3 years

Software features:

LED Player 1024 channels DMX + Stand Alone mode, Live Board mode

Studio DMX 3D viewer Full mode

Pro DMX Yes, 1024 channels, full mode, 30 minute loop of Audio and Video Timeline

Art-Net output from PC Yes, 1 or 2 Universes (DMX + Artnet)



Wi-Light 2016 App Yes, can control the LED Player Live Board with a WIFI connection

System Compatibility Windows, MAC Os X (10.6 and higher) and Linux (64 Bits)

Free software updates Yes

Package Content:

1 USB cable + 1 USB to DMX Interface (3 Pin XLR, 5 pins in option)

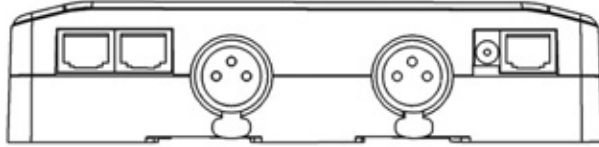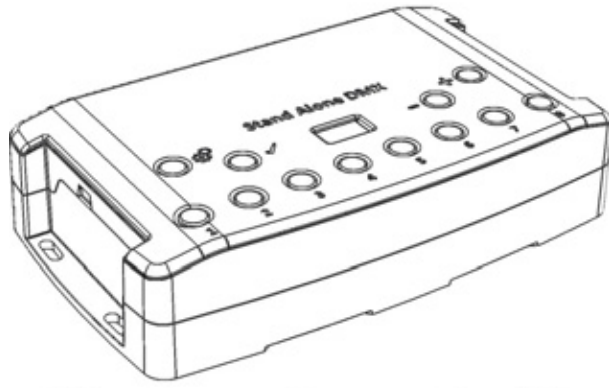

SLIM 512 / SLIM 1024

SLIM 512 and SLIM 1024 are the ideal DMX controllers for all indoor installations. With its wall mounted housing, it is a mesmerizing blend of design, function, and performance. The Stand Alone mode playbacks scenes without a computer and trigger scenes by time or calendar (time schedule). Thanks to its mechanical switch buttons with blue status LED on the front side, you keep a permanent control on your fixtures ! Housing available in black mat or white shining.

Hardware features :

Input USB 2.0 via Mini USB

Number of DMX Outputs (512/1024) up to 512 / 1024 on screw connectors

DMX Modes (1024) 2x512 , 1024 or 512 in/out (PC + Stand Alone)

DMX Input (512) Yes (PC mode only for DMX in record)

DMX Input (1024) Yes (PC and Stand Alone mode, DMX record, DMX trigger)

Stand Alone Mode (512/1024) Yes, 512 / 2x512 (splitter), 1024, 512 in/out, fine DMX channels (16 bits)

Stand Alone DMX Merging (1024) Yes, merge several interfaces to play different Zones together

Internal Memory Yes (4 Mb)

Memory Capacity 20000 steps with 16 ch., 6000 steps with 512 ch., 3000 steps with 1024 ch.

Real Time Clock - RTC Yes, Time and calendar triggers (minutes, hours, week days, month)

Trigger buttons yes, 10 buttons with Blue status LED

Option Buttons Yes, 3 buttons (Mode, Next, Previous)

Button modes Yes, Scene trigger, General Dimmer, Scene speed

Dry Contact Triggers Yes (4 contacts port on screw connectors, 3,3V or 5V)

Infra-red Receiver Yes, external IR PCB and IR remote control available in option

Infra-red Options 10 scene selection, scene speed, general dimmer and next scene

Master/Slave Yes, synchronize and connect up to 32 interfaces together in stand alone

Power Supply Input 9V to 36V DC input on screw connectors, 5V via USB

High Voltage Protection Yes

Housing Wall mounted Black or white, with mounting holes (Euro and US standard), ABS Plastic

Operating Temperature - 25 to +70 C°

Certifications CE, RoHS, Fcc

International Warranty Yes, 3 years

Software features:

LED Player 1512/024 channels DMX + Stand Alone mode, Live Board mode

Studio DMX 3D viewer Full mode

Pro DMX Yes, 512/1024 channels, full mode, 30 minute loop of Audio and Video Timeline

Art-Net output from PC Yes, 1 or 2 Universes (DMX + Artnet)

Wi-Light 2016 App Yes, can control the LED Player Live Board with a WIFI connection

System Compatibility Windows, MAC Os X (10.6 and higher) and Linux (64 Bits)

Free software updates Yes

Package Content:

1 USB cable + 1 USB to DMX Interface (2x8 Pins screw connectors)



LPSA-WIFI

This device has all the Chromateq Stand Alone possibilities and it generates its own WIFI network (Access point mode). LPSA-WIFI can be connected any WIFI local network (WAN) easily in infrastructure mode. It can manage up to 3 zones or play 3 different scenes in Stand Alone. Scenes can be triggered with the Wi-Light 2016 application without computer use. Users can use any tablet or phone to easily access and play the scenes in memory. Basic Live controls are also possible.

Hardware features :

Input WIFI 802.11 b/g/n, 2.4 – 2.497 GHz, 8 ± 1 dBm

Connection modes Yes, Access Point (direct Wifi), Infrastructure (on router or WAN)

Number of DMX Outputs up to 512 on 3 pin XLR (XLR5 optional)

Stand Alone Mode Yes, 512, fine DMX channels (16 bits)

Internal Memory Yes (4 Mb)

Memory Capacity 20000 steps with 16 ch., 6000 steps with 512 ch.

Real Time Clock - RTC Yes, Time and calendar triggers (minutes, hours, week days, month)

APP Trigger Options Wi-Light 2016, Dimmer, Speed, RGBW, Black Out, Full White, Pause, Channels

Dry Contact Triggers Yes (4 contacts port on screw connectors, 3,3V or 5V)

Master/Slave Yes, synchronize and connect up to 32 interfaces together in stand alone

Power Supply Input 9V to 36V DC input on screw connectors, 5V via USB

High Voltage Protection Yes

Housing Wall mounted Black or white, with mounting holes (Euro and US standard), ABS Plastic

Operating Temperature - 25 to +70 C°

Certifications CE, RoHS, Fcc

International Warranty Yes, 3 years

Software features:

LED Player 1512/024 channels DMX + Stand Alone mode, Live Board mode

Studio DMX 3D viewer Full mode

Pro DMX Yes, 512/1024 channels, full mode, 30 minute loop of Audio and Video Timeline

Art-Net output from PC Yes, 1 or 2 Universes (DMX + Artnet)

Wi-Light 2016 App Yes, can control the LED Player Live Board with a WIFI connection

System Compatibility Windows, MAC Os X (10.6 and higher) and Linux (64 Bits)

Free software updates Yes

Package Content:

1 WIFI to DMX Interface (3 Pin XLR, 5 pins in option) + 1 US/EUR 9V. power supply

